2/2-way solenoid valve

2/2-way type

MAX

Art. No. **102842**

Type No. **MV 1221/0**

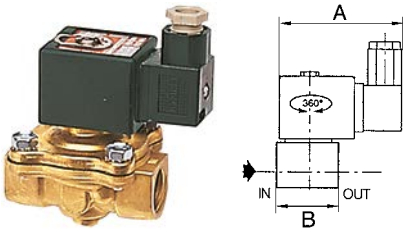

Exemplary illustration

Standard series, proven over many years, available in three different versions

- Directly operated
- Combined operation
- Pilot-operated

For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Discontinued product. No longer available. New product (NONE)

Technical data

Housing	brass
Valve seat	brass
Internal parts	stainless steel
Protection IP	IP 65 (with connector socket fitted)
Type	3
Function	normally closed (NC)
Thread	Rp 1 1/2
DN	32 mm
Voltage	230 V AC
Operating pressure	0 - 9 bar
Sealant	NBR
Electrical connection	ISO 4400, cable socket (PG 11 P)
Medium temperature	-20 to 85 °C
Ambient temperature	-20 to 50 °C
Standard thread	ISO 7-1
A	86.0 mm
B	111.0 mm

RIEGLER & Co. KG
Schützenstraße 27
72574 Bad Urach
Tel. +49 7125 9497-642
technik@riegler.de

Subject to technical changes and errors reserved.
The proficiency testing is the responsibility of the user.
24.03.2026 The specified data do not represent legally guaranteed properties.

Commercial data

Customs tariff number	84812090
Country of origin	NL
eCl@ss 5.1.4	27220601
eCl@ss 9.0	27220601
UNSPSC_Code_v190501	40141605
UNSPSC_CodeDesc_v190501	Solenoid valves

Material informations

REACH SVHC1 substance name	lead
CAS no. SVHC 1	7439-92-1
RoHS materials notice	RoHS compliant
REACH Info	contains SVHC substance

RIEGLER & Co. KG
Schützenstraße 27
72574 Bad Urach
Tel. +49 7125 9497-642
technik@riegler.de

Subject to technical changes and errors reserved.
The proficiency testing is the responsibility of the user.
24.03.2026 The specified data do not represent legally guaranteed properties.

RIEGLER

ASCO®

SOLENOID VALVES

pilot operated
hung diaphragm
3/8 to 1 1/2

NC 

NO 

2/2
Series
210

FEATURES

- *Two way shut-off valves for the control air, inert gas, water, oil and other gases/liquids compatible with the sealing material used*
- *Valves do not require a minimum operating pressure*
- *All products are covered by Pressure Equipment Directive 97/23/EC and are suitable for group 1 and 2 fluids*
- *The solenoid valves satisfy all relevant EC directives*

C

GENERAL

Differential pressure	See «SPECIFICATIONS» [1 bar =100 kPa]
Maximum viscosity	65 cSt (mm²/s)
Response time	15 - 120 ms

fluids (✳)	temperature range (TS)	seal materials (✳)
air, inert gas, water, oil	- 20°C to + 85°C	NBR (nitrile)

MATERIALS IN CONTACT WITH FLUID

(✳) Ensure that the compatibility of the fluids in contact with the materials is verified

	Brass body	Stainless steel body
Body	Brass	AISI 304 SS
Core tube	Stainless steel	Stainless steel
Core and plugnut	Stainless steel	Stainless steel
Springs	Stainless steel	Stainless steel
Seat	Brass	Stainless steel
Seals, diaphragm & disc	NBR	NBR
Disc holder (NO function)	PA	PA
Shading coil	Copper	Silver

ELECTRICAL CHARACTERISTICS

Coil insulation class	F or H
Connector	Spade plug (cable Ø 6-10 mm)
Connector specification	ISO 4400 / EN 175301-803, form A
Electrical safety	IEC 335
Electrical enclosure protection	Moulded IP65 (EN 60529)
Standard voltages	DC (=) : 24V - 48V
(Other voltages and 60 Hz on request)	AC (~) : 24V - 48V - 115V - 230V / 50 Hz

prefix option	power ratings: inrush ~ (VA)	power ratings: holding ~ (VA)	power ratings: holding ~ (W)	power ratings: hot/cold = (W)	operator ambient temperature range (TS) (C°)	replacement coil: ~ 230 V/50 Hz	replacement coil: = 24 V DC	type (1)
SC	5	23	10,5	9/ 11,2	-20 to + 75	400425-117	400425-142	01
	78	35	16,7	-	-20 to + 50	400425-217	-	01
	110	33,6	15,4	-	-20 to + 75	400525-117	-	02
	240	43	20	16,8/23	-20 to + 50	400525-217	400625-242	02

(1) Refer to the dimensional drawings on the following page.

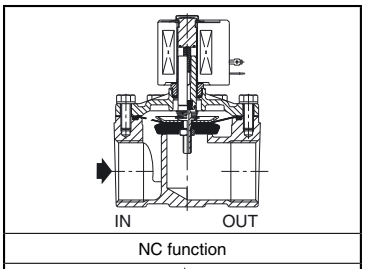

NC function

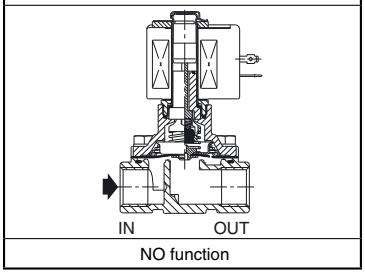

NO function

SPECIFICATIONS

pipe size	orifice size	flow coefficient Kv		operating pressure differential (bar) min.	max. (PS) air (✳)		water (✳)		oil (✳)		power coil (W)		catalogue number		options			
													brass	stainless steel	maintained man. operator	FPM	EPDM	CR
	(mm)	(m³/h)	(l/min)		~	=	~	=	~	=	~	=						
NC - Normally closed																		
Rp 3/8	16	2,6	43	0	9	3	9	3	-	-	10,5	11,2	**SCE210C093**	-	MO	V	E	J
Rp 1/2	16	3,4	57	0	9	3	9	3	-	-	10,5	11,2	**SCE210C094**	-	MO	V	E	J
G 1/2					9	3	9	3	9	-	16,7	11,2	-	**SCG210C087**	MO	V	E	J
Rp 3/4	19	4,3	72	0	9	3	9	3	-	-	10,5	11,2	**SCE210D095**	-	MO	V	E	J
G 3/4	16	3,9	65	0	9	3	9	3	9	-	16,7	11,2	-	**SCG210C088**	MO	V	E	J
Rp 1	25	11,1	185	0	9	6	9	6	9	6	15,4	23	**SCE210B154**	-	MO	V	E	J
G 1		9,6	160	0	9	7	9	7	9	5	15,4	23	-	**SCG210D189**	-	V	E	J
Rp 1 1/4	28	12,8	213	0	9	6	9	6	9	6	15,4	23	**SCE210B155**	-	MO	V	E	J
Rp 1 1/2	32	19,3	322	0	9	5	9	5	9	5	15,4	23	**SCE210B156**	-	MO	V	E	J
NO - Normally open																		
Rp 3/8	16	2,6	43	0	9	9	9	9	9	5	10,5	11,2	**SCE210C033**	-	-	V	E	J
Rp 1/2	16	3,4	57	0	9	9	9	9	9	5	10,5	11,2	**SCE210C034**	-	-	V	E	J
NPT 1/2		2,6	43	0	9	9	9	9	7	5	10,5	11,2	-	**SCB210B030**	-	V	E	J
Rp 3/4	19	4,7	79	0	9	9	9	9	9	5	10,5	11,2	**SCE210C035**	-	-	V	E	J
NPT 3/4	16	2,6	43	0	9	9	9	9	7	5	10,5	11,2	-	**SCB210B038**	-	V	E	J
Rp 1	25	11,2	185	0	9	-	9	-	9	-	20	-	**SCE210B057**(2)	-	-	V	E	J
Rp 1 1/4	28	12,8	213	0	9	-	9	-	9	-	20	-	**SCE210B058**(2)	-	-	V	E	J
Rp 1 1/2	32	19,3	322	0	9	-	9	-	9	-	20	-	**SCE210B059**(2)	-	-	V	E	J

(2) Mounting position: piping horizontal, solenoid upright.

0040GB-2011/R01
Availability, design and specifications are subject to change without notice. All rights reserved.

All leaflets are available on: **www.asconumatics.eu**

V313-1

RIEGLER & Co. KG
Schützenstraße 27
72574 Bad Urach
Tel. +49 7125 9497-642
technik@riegler.de

Subject to technical changes and errors reserved.
The proficiency testing is the responsibility of the user.
24.03.2026 The specified data do not represent legally guaranteed properties.

OPTIONS

- Valves can also be supplied with FPM (fluoroelastomer), EPDM (ethylene-propylene) and CR (chloroprene) diaphragms, seals and discs. Use the appropriate optional suffix letter for identification
- Waterproof enclosure with embedded screw terminal coil according to protection class IP67, CEE-10
- Explosionproof enclosures for use in zones 1/21-2/22, categories 2-3 to ATEX Directive 94/9/EC (see "Explosionproof solenoids" section)
- Electrical enclosures according to "NEMA" standards are available
- Compliance with "UL", "CSA" and other local approvals available on request
- Mounting brackets for brass bodied valves, suffix MB (Except pipe size Rp 1, 1 1/4 and 1 1/2)
- For protection against corrosion caused by the environment or the fluid, contact us
- Other pipe connections are available on request
- Plug with visual indication and peak voltage suppression or with cable length of 2 m (see Solenoids, Coils & Accessories section)

INSTALLATION

- The solenoid valves can be mounted in any position without affecting operation, unless indicated otherwise in the specifications table.
- Stainless steel valves are standard supplied with mounting brackets
- Pipe connection identifiers are: G = G (ISO 228/1), E = Rp (ISO 7/1) or B = NPT (ANSI 1.20.3)
- Installation/maintenance instructions are included with each valve

SPARE PARTS KIT & ACCESSORIES

catalogue number	spare parts kit no.		mounting bracket
	~	=	
SCE210C093/C094	**C302272**	**C302372**	**038713-000**
SCE210D095	**C302276**	**C302375**	**038713-000**
SCE210B154	**C302283**	**C133800**	**-**
SCE210B155	**C302283**	**C133801**	**-**
SCE210B156	**C302286**	**C133802**	**-**
SCE210C033/C034	**C302334**	**C302449**	**038713-000**
SCE210C035	**C302335**	**C302450**	**038713-000**
SCE210B057	**C302337**	**-**	**-**
SCE210B058	**C302339**	**-**	**-**
SCE210B059	**C302340**	**-**	**-**
SCG210C087/C088	**C302328**	**C302423**	**038713-000**
SCB210B030/B038	**C302347**	**C302447**	**-**
SCG210D189	**C302329**	**C133668**	**-**

(1) Standard prefixes/suffixes are also applicable to kits.
- Not available

ORDERING EXAMPLES:

SC	E	210 **C** 093		230V / 50 Hz
SC	E	210 **C** 094	**MO**	115V / 50 Hz
SC	B	210 **C** 087	**V**	24V / DC
SC	B	210 **D** 089		230V / 50 Hz

prefix
pipe thread
basic number
voltage
suffix

ORDERING EXAMPLES KITS:

C302272(1)	
C302276	**V**
C302449	**E**

basic number
suffix

DIMENSIONS (mm), WEIGHT (kg)

TYPE 01-02
Prefix "SC" Solenoid
Epoxy moulded
IEC 335 / ISO 4400
IP65

Type 01: SCE210C093/C094/D095
SCG210C087/C088
Type 02: SCE210B154/B155
SCG210D189

Type 01: SCE210C033/C034/C035
SCB210B030/B038
Type 02: SCB210B057/B058/B059

Type 02: SCE210B156

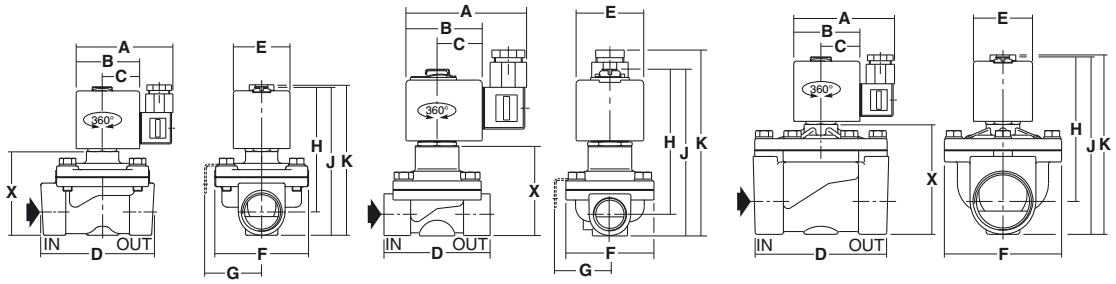

type	prefix option	catalogue number	A	B	C	D	E	F	G	H	J	K	X	weight (2)
01	SC	SCE210C093/C094	80	50	30	70	45	58	41	80	97	109	46	0,8
		SCE210D095	80	50	30	73	45	58	41	89	103	121	54	1,0
		SCG210C087/C088	80	50	30	71	45	61	41	87	105	122	55	1,0
		SCE210C033/C034	80	50	30	70	45	58	41	98	108	127	60	0,9
		SCE210C035	80	50	30	70	45	58	41	102	117	132	68	1,0
		SCB210B030/B038	80	50	30	71	45	59	41	100	116	133	67	1,0
02	SC	SCE210B156	86	56	33	111	50	99	-	125	153	158	96	2,8
		SCE210B154	86	56	33	95	50	83	-	112	129	137	75	2,0
		SCE210B155	86	56	33	95	50	83	-	112	143	148	86	2,0
		SCG210D189	86	56	33	95	50	99	56	113	133	132	77	2,2
		SCE210B057	86	56	33	95	50	83	-	155	172	157	98	2,0
		SCE210B058	86	56	33	95	50	83	-	161	187	187	130	2,0
		SCE210B059	86	56	33	111	50	99	-	167	194	194	137	2,5

(2) Incl. coil(s) and connector(s)



Mounting brackets
for valves: 0,3 kg
SCE210C093/C094/D095
SCG210C087/C088/D189
SCE210C033/C034/C035

All leaflets are available on: **www.asconumatics.eu**

V313-2

0040GB-2008/R02
Availability, design and specifications are subject to change without notice. All rights reserved.

RIEGLER & Co. KG
Schützenstraße 27
72574 Bad Urach
Tel. +49 7125 9497-642
technik@riegler.de

Subject to technical changes and errors reserved.
The proficiency testing is the responsibility of the user.
24.03.2026 The specified data do not represent legally guaranteed properties.