


Throttle check valve

adjustable with slotted-head screwdriver

PLUS ||

Art. No. 106885

Type No. 357.014-6

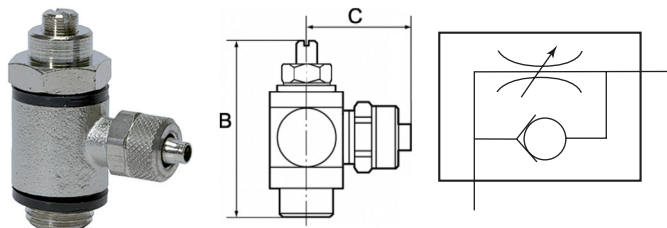

Exemplary illustration

For throttling flow rates and regulating the piston speed of cylinders. Small dimensions, ideal for tight spaces. To be screwed directly into the valve or cylinder. The set flow rate can be locked via the lock nut in the version with knurled screw. The variants in banjo bolt construction can be rotated during assembly and are fixed after tightening. The variants with plug-in connector, rotated can also be rotated freely after assembly. The seals and lubricants used are silicone-free.

Discontinued product. No longer available. New product 106908 (339.014-6)

Technical data


Function	incoming air restriction
Version	adjustable with slotted-head screwdriver
Design	L-shape, banjo bolt type
Operating pressure	0 - 10 bar
Temperature range	-20 to 80 °C
Type of connection	quick lock screw fitting
Port 1	screw fitting Ø 6/4 mm
Port 2	G 1/4 ET
Medium	filtered, lubricated compressed air
Body	nickel-plated brass
Sealant	NBR
Captive seals	polyamide glass fibre-reinforced (only parts in banjo bolt construction)
Silicone-free	yes
a/f	17 mm
B	40.0 mm
C	26.5 mm

Commercial data

Customs tariff number	84812090
Country of origin	IT
eCl@ss 5.1.4	27292203
eCl@ss 9.0	27292203
UNSPSC_Code_v190501	40141603
UNSPSC_CodeDesc_v190501	Pneumatic valves

Markings for valve functions

Supply air throttle



Marking
(alphabetical code)

V