


Throttle valve

block design, stainless steel 1.4404

STAINLESS STEEL

Art. No. 103813

Type No. ES 225.53

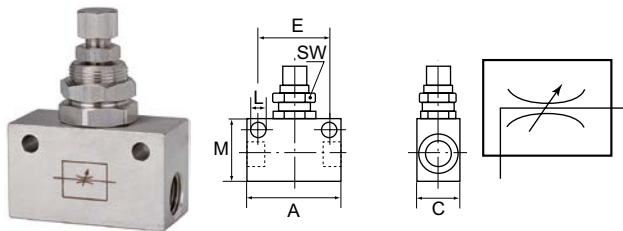

Exemplary illustration

Straight-way valves with restricted flow in both directions.

Technical data

Function	both directions throttling
Version	adjustable with knurled screw
Design	block type
Connection	G 1/8 IT
Medium	filtered, lubricated compressed air
Operating pressure	max. 10 bar
Operating temperature	0 to 150 °C
Housing	stainless steel 1.4404
Sealant	FPM
Internal parts	stainless steel 1.4404
a/f	14 mm
A	34.0 mm
C	15.0 mm
E	24.0 mm
L	4.5 mm
M	20.0 mm


Commercial data


Customs tariff number	74122000
Country of origin	IT
eCl@ss 5.1.4	27292202
eCl@ss 9.0	27292202
UNSPSC_Code_v190501	40141603
UNSPSC_CodeDesc_v190501	Pneumatic valves

Material informations

RoHS materials notice	RoHS compliant
REACH Info	no SVHC substance included

Flow chart



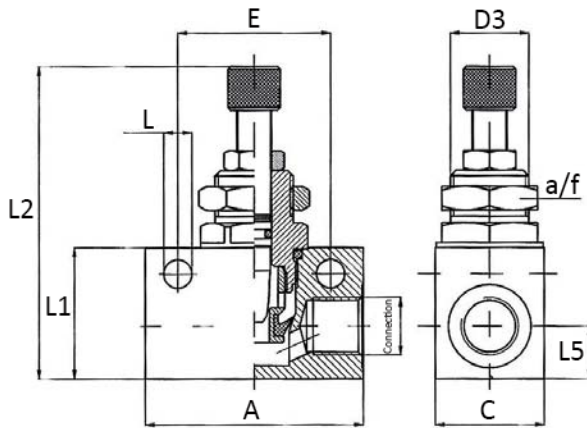

Connection	L	D3	L1	L2	A	E	L5	C	a/f
	mm	mm	mm	mm	mm	mm	mm	mm	mm
G 1/8 IT	4.5	12x0.75	20.0	56.0	34.0	24.0	7.5	15.0	14