


# Throttle valve

adjustable with knurled screw and slotted-head screwdriver

**PLUS** ||

Art. No. 107002

Type No. 338.005-4

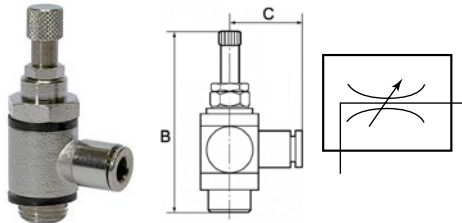

Exemplary illustration

For throttling flow rates and regulating the piston speed of cylinders. Small dimensions, ideal for tight spaces. To be screwed directly into the valve or cylinder. The set flow rate can be locked via the lock nut in the version with knurled screw. The variants in banjo bolt construction can be rotated during assembly and are fixed after tightening. The variants with plug-in connector, rotated can also be rotated freely after assembly. The seals and lubricants used are silicone-free.

Discontinued product. No longer available. New product 116953 (338.005-4-D)

## Technical data

|                    |                                                                          |
|--------------------|--------------------------------------------------------------------------|
| Function           | both directions throttling (B)                                           |
| Type of connection | plug-in connector                                                        |
| Design             | Banjo bolt construction                                                  |
| Thread             | M5 ET                                                                    |
| Medium             | filtered, lubricated compressed air                                      |
| Operating pressure | 0 - 10 bar                                                               |
| Temperature range  | -20 to 80 °C                                                             |
| Body               | Nickel-plated brass                                                      |
| Sealant            | NBR                                                                      |
| Captive seals      | polyamide glass fibre-reinforced (only parts in banjo bolt construction) |
| Silicone-free      | yes                                                                      |
| For hose           | 4 mm                                                                     |
| a/f                | 8 mm                                                                     |
| B                  | 38.9 mm                                                                  |
| C                  | 18.6 mm                                                                  |

## Commercial data


|                         |                  |
|-------------------------|------------------|
| Customs tariff number   | 84812090         |
| Country of origin       | IT               |
| eCl@ss 5.1.4            | 27292202         |
| eCl@ss 9.0              | 27292202         |
| UNSPSC_Code_v190501     | 40141603         |
| UNSPSC_CodeDesc_v190501 | Pneumatic valves |

## Material informations

|                            |                         |
|----------------------------|-------------------------|
| REACH SVHC1 substance name | lead                    |
| CAS no. SVHC 1             | 7439-92-1               |
| RoHS materials notice      | RoHS compliant          |
| REACH Info                 | contains SVHC substance |

## Markings for valve functions

### Both directions throttling



Marking  
(alphabetical code)

B