


Bushing - blocking valve

Brass



Art. No. 103790

Type No. 250.52



Exemplary illustration

Technical data


Wheel	aluminium
Housing	brass
Sealant	EPDM
Bonnet	brass
Applications	non-corrosive liquids and steam up to 90 °C
Max. operating pressure	10 bar
Operating temperature	-10 to 80 °C
Thread	G 3/4
DN	20 mm
A	55,5 mm
B	78 mm
L	54,5 mm

Commercial data

Customs tariff number	84818069
Country of origin	TW
eCl@ss 5.1.4	27292002
eCl@ss 9.0	27292002
UNSPSC_Code_v190501	40141603
UNSPSC_CodeDesc_v190501	Pneumatic valves

Material informations

REACH SVHC1 substance name	lead
CAS no. SVHC 1	7439-92-1
RoHS materials notice	RoHS compliant
REACH Info	contains SVHC substance

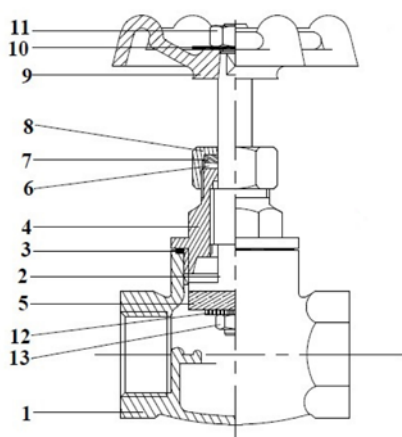

Nr.	Component	Material
1	Housing	CC754S
2	Spindle	C3604
3	Washer	Fiber
4	top part	CC754S
5	Seal	EPDM
6	Spindle seal	PTFE
7	Gland	C3604
8	Gland nut	C3604
9	Handwheel	Aluminum casting alloy
10	Identification plate	A1080
11	Handwheel nut	S20C
12	Washer	C3604
13	Nut	C3604