


2/2-way solenoid valve

2/2-way type

MAX |||

Art. No. 102831

Type No. MV 2214 G

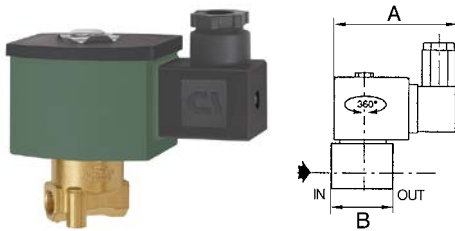

Exemplary illustration

Standard series, proven over many years, available in three different versions

- Directly operated
- Combined operation
- Pilot-operated

For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Technical data

Housing	brass
Valve seat	brass
Internal parts	stainless steel
Protection IP	IP 65 (with connector socket fitted)
Type	7
Function	normally open (NO)
Thread	Rp 1/8
DN	2.4 mm
Voltage	24 V DC
Operating pressure	0 - 11 bar
Sealant	NBR
Electrical connection	ISO 4400, cable socket (PG 11 P)
Medium temperature	-25 to 80 °C
Ambient temperature	-25 to 55 °C
Standard thread	ISO 7-1
A	75.0 mm
B	33.0 mm

Commercial data

Customs tariff number	84812090
Country of origin	NL
eCl@ss 5.1.4	27220601
eCl@ss 9.0	27220601
UNSPSC_Code_v190501	40141605
UNSPSC_CodeDesc_v190501	Solenoid valves

Material informations

REACH SVHC1 substance name	lead
CAS no. SVHC 1	7439-92-1
RoHS materials notice	RoHS compliant
REACH Info	contains SVHC substance

















