


Female bulkhead connectors

stainless steel

STAINLESS STEEL

Art. No. 135255

Type No. 851.011-4 ES

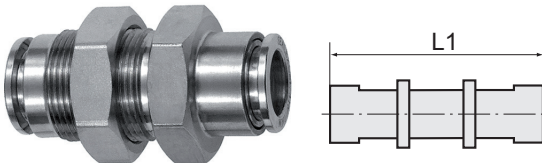

Exemplary illustration

For use in more aggressive environments and corrosive media.

The suitability test for the individual application is the user's responsibility.

Technical data

Max. working pressure	20 bar
Operating temperature	-20 to 150 °C
Medium temperature	-20 to 150 °C
Series	inox line
Material	stainless steel 1.4404
Medium	compressed air,corrosive media (if compatible with material)
Sealant	FKM, FPM
Applications	compressed air syst.,chemical and food, pharma, pack.,vacuum
Recommended pipe materials	PVDF, PTFE, PA, PU
for tube O.D.	4 mm
L1	33.0 mm
a/f	14 mm
Thread for panel mounting	M11x0.75 ET

The suitability test for the use with alternative specifications is the user's responsibility.


Commercial data

Customs tariff number	73072910
Country of origin	IN
eCl@ss 5.1.4	27294201
eCl@ss 9.0	27294201
UNSPSC_Code_v190501	27131613
UNSPSC_CodeDesc_v190501	Air coupling

Material informations

RoHS materials notice	RoHS compliant
REACH Info	no SVHC substance included

Dimensions

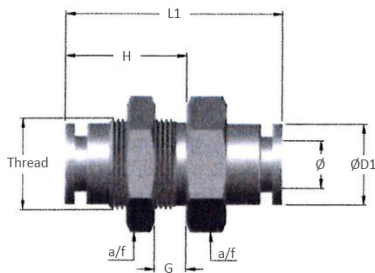

Thread for panel mounting	for tube O.D.	H	a/f	L1	D1	G
	mm	mm	mm	mm	mm	mm
M11x0.75 ET	4	18.8	14	33.0	10.0	6,0

Accessories

	Art. No.	Type No.
Loosening tool for quick-connect fittings, for hose exterior Ø 3 - 10 mm	108853	LW3-10
Loosening tool for quick-connect fittings, for hose exterior Ø 4 - 14 mm	121863	LW4-14