# Stainless steel ball valve

Stainless steel, 3-piece - length acc. to DIN 3202-M3, lockable

STAINLESS STEEL

**Art. No.** 135915

**Type No.** 3390.06




Exemplary illustration

## Technical data

| | |
|---|---|
| Housing | Stainless steel 1.4408 |
| Ball | Stainless steel 1.4401 |
| Ball seal | PTFE (15 % glass fibre reinforced) |
| Stem seal | PTFE |
| Hand lever | stainless steel 1.4301, with plastic coating |
| Operating temperature | -20 to 180 °C |
| PN | 63 bar |
| Standard thread | G-thread DIN EN ISO 228-1, flange plate ISO 5211 |
| Thread | G 1 1/4 |
| C Ø | 32.0 mm |
| DN | 32 |
| L | 110.0 mm |
| A | 150.0 mm |
| B | 93.5 mm |
| Bore diameter padlock | ca. 7.7 mm |

Stainless steel ball valve with full bore

## Commercial data

| | |
|---|---|
| Customs tariff number | 84818081 |
| Country of origin | CN |
| eCl@ss 5.1.4 | 27292002 |
| eCl@ss 9.0 | 27292002 |
| UNSPSC_Code_v190501 | 40141603 |
| UNSPSC_CodeDesc_v190501 | Pneumatic valves |

RIEGLER & Co. KG
Schützenstraße 27
72574 Bad Urach
Tel. +49 7125 9497-642
technik@riegler.de



Subject to technical changes and errors reserved.
The proficiency testing is the responsibility of the user.
16.05.2025 The specified data do not represent legally guaranteed properties.

## Material informations

| | |
|---|---|
| RoHS materials notice | RoHs compliant |
| REACH Info | no SVHC substance included |

## Pressure-temperature rating

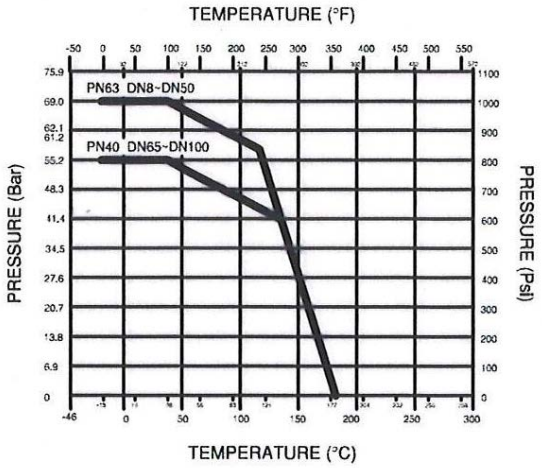


RIEGLER & Co. KG
Schützenstraße 27
72574 Bad Urach
Tel. +49 7125 9497-642
technik@riegler.de



Subject to technical changes and errors reserved.
The proficiency testing is the responsibility of the user.
16.05.2025 The specified data do not represent legally guaranteed properties.