Bushing - locking pusher


Art. No. 103778

Type No. 250.37









Exemplary illustration

Opening / closing without stem stroke

Technical data

Housing	brass
Head piece	brass
Max. operating pressure	16 bar
Thread	G 1 1/4
DN	32 mm
A	60 mm
B	133 mm
L	58 mm
Applications	non-corrosive liquids, gases and steam up to 120 °C

Commercial data


Customs tariff number	84818069
Country of origin	TW
eCl@ss 5.1.4	27292002
eCl@ss 9.0	27292002
UNSPSC_Code_v190501	40141603
UNSPSC_CodeDesc_v190501	Pneumatic valves

RIEGLER & Co. KG
Schützenstraße 27
72574 Bad Urach
Tel. +49 7125 9497-642
technik@riegler.de

Subject to technical changes and errors reserved.
The proficiency testing is the responsibility of the user.
26.10.2026 The specified data do not represent legally guaranteed properties.

Material informations

REACH SVHC1 substance name	lead
CAS no. SVHC 1	7439-92-1
RoHS materials notice	RoHS compliant
REACH Info	contains SVHC substance

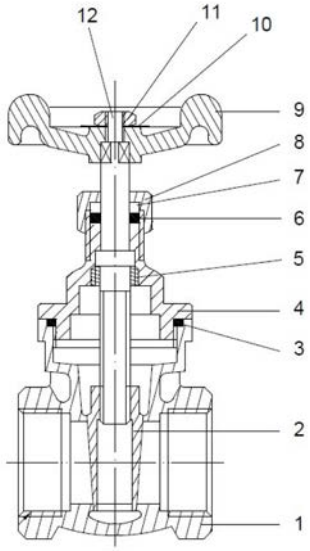

Nr.	Component	Material
1	Housing	CC754S
2	Closing unit	CC754S
3	Washer	Fiber
4	top part	CC754S
5	Lock nut	C3604
6	Gland seal	PTFE
7	Gland	C3604
8	Gland nut	C3604
9	Handwheel	Aluminum casting alloy
10	Identification plate	A1080
11	Nut	S20C
12	Spindle	C3604

RIEGLER & Co. KG
Schützenstraße 27
72574 Bad Urach
Tel. +49 7125 9497-642
technik@riegler.de

Subject to technical changes and errors reserved.
The proficiency testing is the responsibility of the user.
26.10.2026 The specified data do not represent legally guaranteed properties.