Stainless steel ball valve

Stainless steel, 2-piece - standard type, lockable

STAINLESS STEEL

Art. No. 135893

Type No. 3395.02



Exemplary illustration

Technical data

Housing	Stainless steel 1.4408
Ball	Stainless steel 1.4401
Ball seal	PTFE (15 % glass fibre reinforced)
Stem seal	PTFE
Hand lever	stainless steel 1.4301, with plastic coating
Operating temperature	-20 to 180 °C
PN	63 bar
Standard thread	G-thread DIN EN ISO 228-1, R-thread DIN EN 10226 (ISO 7-1)
Thread	G 3/8
C Ø	10.0 mm
DN	10
L	48.0 mm
A	95.0 mm
B	50.0 mm
E	9.5 mm
F	9.5 mm
Flow rate kv value	7.9 m^3/h
Bore diameter padlock	ca. 6.0 mm

Stainless steel ball valve, IT/IT thread, with full bore

RIEGLER & Co. KG
Schützenstraße 27
72574 Bad Urach
Tel. +49 7125 9497-642
technik@riegler.de

Subject to technical changes and errors reserved.
The proficiency testing is the responsibility of the user.
16.05.2025 The specified data do not represent legally guaranteed properties.

Commercial data

Customs tariff number	84818081
Country of origin	CN
eCl@ss 5.1.4	27292002
eCl@ss 9.0	27292002
UNSPSC_Code_v190501	40141603
UNSPSC_CodeDesc_v190501	Pneumatic valves

Material informations

RoHS materials notice	RoHs compliant
REACH Info	no SVHC substance included

Pressure-temperature rating

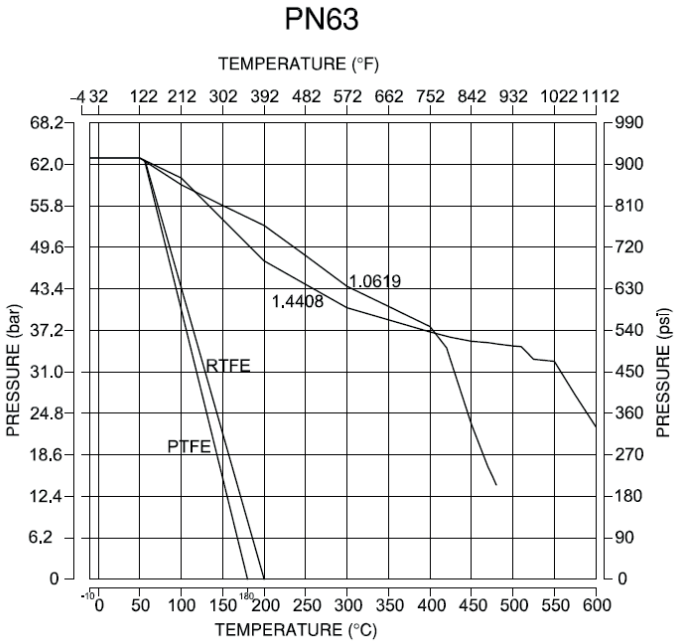

RIEGLER & Co. KG
Schützenstraße 27
72574 Bad Urach
Tel. +49 7125 9497-642
technik@riegler.de

Subject to technical changes and errors reserved.
The proficiency testing is the responsibility of the user.
16.05.2025 The specified data do not represent legally guaranteed properties.