Bushing

Stainless steel 1.4408

STAINLESS STEEL

Art. No. **119383**

Type No. **MUG18ES4408K**

Exemplary illustration

Technical data

Max. working pressure	20 bar
Thread	G 1/8
L1	8.2 mm
Thread form	parallel female thread
Standard thread	DIN EN ISO 228-1
Version	round, short type

From thread size of 1 inch, we recommend using an adjustable open-end wrench.

To ensure a propper sealing of the cylindrical threads (G) and tapered threads (R/Rp) we recommend using a suitable sealant (e.g. hemp, sealing tape or suitable industrial adhesive).

Commercial data

Customs tariff number	73072210
Country of origin	CN
eCl@ss 5.1.4	22360605
eCl@ss 9.0	22560205
UNSPSC_Code_v190501	40172607
UNSPSC_CodeDesc_v190501	Stainless steel pipe coupling

Material informations

REACH SVHC1 substance name	no
CAS no. SVHC 1	no CAS No.
RoHS materials notice	RoHS compliant
REACH Info	no SVHC substance included

RIEGLER & Co. KG
Schützenstraße 27
72574 Bad Urach
Tel. +49 7125 9497-642
technik@riegler.de

Subject to technical changes and errors reserved.
The proficiency testing is the responsibility of the user.
05.04.2024 The specified data do not represent legally guaranteed properties.

Dimensions

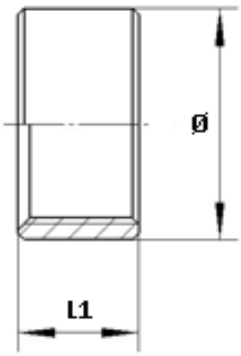

Thread	L1	Ø
	mm	mm
G 1/8	8.2	14.8

From thread size of 1 inch, we recommend using an adjustable open-end wrench.

To ensure a propper sealing of the cylindrical threads (G) and tapered threads (R/Rp) we recommend using a suitable sealant (e.g. hemp, sealing tape or suitable industrial adhesive).

RIEGLER & Co. KG
Schützenstraße 27
72574 Bad Urach
Tel. +49 7125 9497-642
technik@riegler.de

Subject to technical changes and errors reserved.
The proficiency testing is the responsibility of the user.
05.04.2024 The specified data do not represent legally guaranteed properties.