


Female bulkhead connectors

stainless steel

STAINLESS STEEL

Art. No. 110428

Type No. 51.016-8 ES

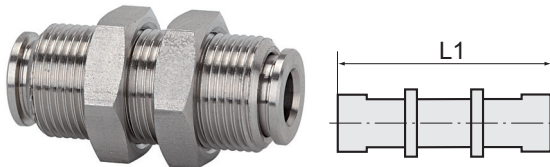

Exemplary illustration

For use with aggressive media and in areas susceptible to corrosive outside

influences, in the food processing industry and in hygienic and sanitary applications.

Discontinued product. No longer available. New product 135257 (851.016-8 ES)

Technical data

Working pressure pulsate	10 bar
Max. working pressure	15 bar
Operating temperature	-20 to 150 °C
Medium temperature	-20 to 150 °C
Series	inox line
Material	stainless steel 1.4404
Sealant	FKM, FPM
Recommended pipe materials	PVDF, PTFE, PA, PU
for tube O.D.	8 mm
L1	34.5 mm
Max. L2	17.0 mm
a/f	19 mm
Thread for panel mounting	M16x1.0 ET

The maximum working pressure depends on the pipe quality.

The medium and operating temperature depends on the pipe quality and diameter.


Commercial data

Customs tariff number	73071990
Country of origin	IT
eCl@ss 5.1.4	27294201
eCl@ss 9.0	27294201
UNSPSC_Code_v190501	27131613
UNSPSC_CodeDesc_v190501	Air coupling

Material informations

REACH SVHC1 substance name	no
CAS no. SVHC 1	no CAS No.
RoHS materials notice	RoHS compliant
REACH Info	no SVHC substance included

Dimensions



Thread for panel mounting	for tube O.D.	a/f	L1	Max. L2
	mm	mm	mm	mm
M16x1.0 ET	8	19	34.5	17.0