
5/2-way valve

robust type

MAX

Art. No. 106600

Type No. 517.622

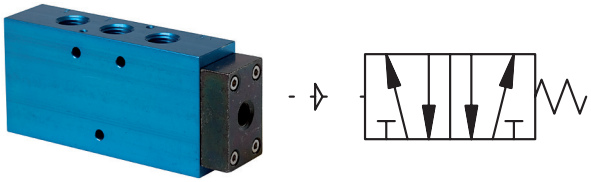

Exemplary illustration

This valve design, featuring the Tapered Tee Seal®, offers the ability to run without lubrication and supports almost any compressed air quality.

The valves are largely resistant to dirt and can thus also be used under extreme conditions without any problems.

Leakage is now a thing of the past and the spool no longer sticks, even after long idle periods.

Technical data

Operation	pneumatic
Function	5/2 monostable
Connection	G 1/4 IT
Electrical connection	connector socket PG 9, type B
Protection IP	IP 65
Control air port	G 1/8 IT
DN	7.5 mm
Flow rate measurement	flow rate at 6 bar and Δp 1 bar
Flow rate	1500 Nl/min
Medium	filtered compressed air with or without lubrication. If lubricated, then continuous.
Operating pressure	2.5 - 10 bar
Pilot pressure	min. 2.5 bar
Temperature range	-10 to 60 °C
Housing	anodised aluminium, blue
Sealant	NBR
Spool	stainless steel
Manual control	non-latching
Series	robust type

RIEGLER & Co. KG
Schützenstraße 27
72574 Bad Urach
Tel. +49 7125 9497-642
technik@riegler.de

Subject to technical changes and errors reserved.
The proficiency testing is the responsibility of the user.
25.09.2026 The specified data do not represent legally guaranteed properties.

Commercial data

Customs tariff number	84818079
Country of origin	US
eCl@ss 5.1.4	27291501
eCl@ss 9.0	27291390
UNSPSC_Code_v190501	40141603
UNSPSC_CodeDesc_v190501	Pneumatic valves

RIEGLER & Co. KG
Schützenstraße 27
72574 Bad Urach
Tel. +49 7125 9497-642
technik@riegler.de

Subject to technical changes and errors reserved.
The proficiency testing is the responsibility of the user.
25.09.2026 The specified data do not represent legally guaranteed properties.