


Throttle check valve

in block design, stainless steel 1.4404

STAINLESS STEEL

Art. No. 103808

Type No. ES 225.34

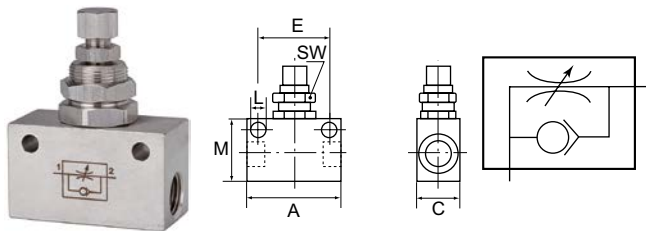

Exemplary illustration

Unidirectional flow control valve, restricted in the flow direction and free passage in the opposite direction.

Technical data

Function	one-way flow control
Version	adjustable with knurled screw
Design	block type
Connection	G 1/4 IT
Medium	filtered, lubricated compressed air
Operating pressure	max. 10 bar
Operating temperature	0 to 150 °C
Housing	stainless steel 1.4404
Sealant	FPM
Internal parts	stainless steel 1.4404
a/f	22 mm
A	50.0 mm
C	25.0 mm
E	35.0 mm
L	5.5 mm
M	30.0 mm


Commercial data


Customs tariff number	84813091
Country of origin	IT
eCl@ss 5.1.4	27292203
eCl@ss 9.0	27292203
UNSPSC_Code_v190501	40141603
UNSPSC_CodeDesc_v190501	Pneumatic valves

Material informations

RoHS materials notice	RoHS compliant
REACH Info	no SVHC substance included

Flow chart



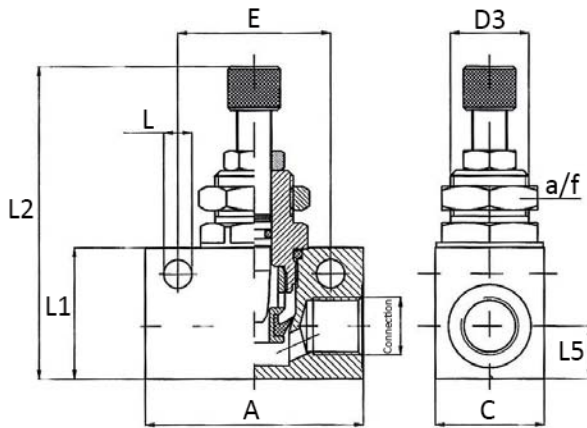

Connection	L	D3	L1	L2	A	E	L5	C	a/f
	mm	mm	mm	mm	mm	mm	mm	mm	mm
G 1/4 IT	5.5	18x1.5	30.0	75.0	50.0	35.0	12.0	25.0	22