GEKA hose piece

GEKA-plus series, lead-free brass, with KTW approval

Art. No. 154157

Type No. K 110-KTW.MSB



Exemplary illustration

GEKA couplings for potable water, lead-free brass, with KTW approval.
Lead-free brass (Pb < 0.1%)

Technical data

Max. operating pressure	40 bar
Medium temperature	-10 to 90 °C
Ambient temperature	-10 to 90 °C
Sealant	EPDM for potable water
KTW approval	after D2 and long-term test results DVGW W270
Connection	G 1/2 IT
Lead-free brass (lead content <0.1%)	yes

Commercial data

Customs tariff number	74122000
Country of origin	CN
eCl@ss 5.1.4	37110390
eCl@ss 9.0	37110390
UNSPSC_Code_v190501	40141734
UNSPSC_CodeDesc_v190501	Hose fitting


Material informations

RoHS materials notice	RoHS compliant
REACH Info	no SVHC substance included

RIEGLER & Co. KG
Schützenstraße 27
72574 Bad Urach
Tel. +49 7125 9497-642
technik@riegler.de

Subject to technical changes and errors reserved.
The proficiency testing is the responsibility of the user.
04.05.2026 The specified data do not represent legally guaranteed properties.

Dimensions

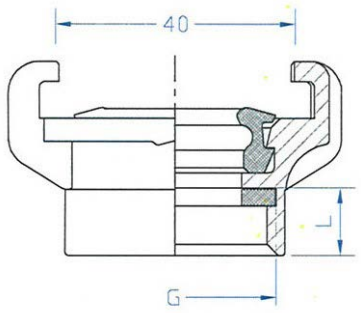

Connection	L
	mm
G 1/2 IT	9.5

Spareparts

	Art. No.	Type No.
Sealing ring, EPDM blue, for couplings of series GEKA-plus, lead-free brass, with KTW approval, temperature range -10 °C to 90 °C	154170	D 300.MSB

RIEGLER & Co. KG
Schützenstraße 27
72574 Bad Urach
Tel. +49 7125 9497-642
technik@riegler.de

Subject to technical changes and errors reserved.
The proficiency testing is the responsibility of the user.
04.05.2026 The specified data do not represent legally guaranteed properties.