3/2-way valve

pneumatic - »3A« series

EASY

Art. No. **116034**

Type No. **516.1000**



Exemplary illustration

3/2-way pilot valves

- Pneumatic -

Technical data

Operation	pneumatic
Function	3/2 NO
Connection	M5 IT
Exhaust connection	M5 IT
Control air port	G 1/8 IT
Flow cross-section	5.5 mm²
Flow rate measurement	at P_1 = 8 bar, P_2 = 6 bar and pressure drop Δ_p = 1 bar
Flow rate	300 l/min
Medium	filtered compressed air (min. ≤ 40 µm) with or without lubrication. If lubricated, then continuous.
Operating pressure	1.5 - 8 bar
Test pressure	15 bar
Temperature range	-20 to 70 °C
Valve body	aluminium alloy
Size	100
Maximum switching frequency	5 switching cycles
Series	3A

RIEGLER & Co. KG
Schützenstraße 27
72574 Bad Urach
Tel. +49 7125 9497-642
technik@riegler.de

Subject to technical changes and errors reserved.
The proficiency testing is the responsibility of the user.
28.10.2026 The specified data do not represent legally guaranteed properties.


Commercial data

Customs tariff number	84818079
Country of origin	CN
eCl@ss 5.1.4	27291501
eCl@ss 9.0	27291390
UNSPSC_Code_v190501	40141603
UNSPSC_CodeDesc_v190501	Pneumatic valves

Material informations

REACH SVHC1 substance name	no
CAS no. SVHC 1	no CAS No.
RoHS materials notice	RoHS compliant
REACH Info	no SVHC substance included

Components and material

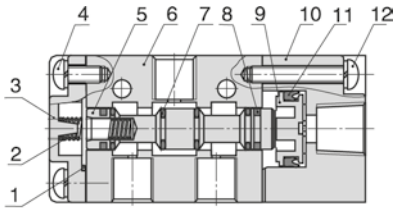


No.	Item	Material
1	Gasket	NBR
2	Spring	Stainless steel
3	Cover	Aluminium alloy
4	Screw	Steel
5	Spool	Aluminium alloy
6	Body	Aluminium alloy
7	O-ring	HNBR
8	Wear ring	PA66
9	Piston	POM
10	Pilot body	Aluminium alloy
11	O-ring	NBR
12	Screw	Steel

RIEGLER & Co. KG
Schützenstraße 27
72574 Bad Urach
Tel. +49 7125 9497-642
technik@riegler.de

Subject to technical changes and errors reserved.
The proficiency testing is the responsibility of the user.
28.10.2026 The specified data do not represent legally guaranteed properties.

Dimensions [mm]

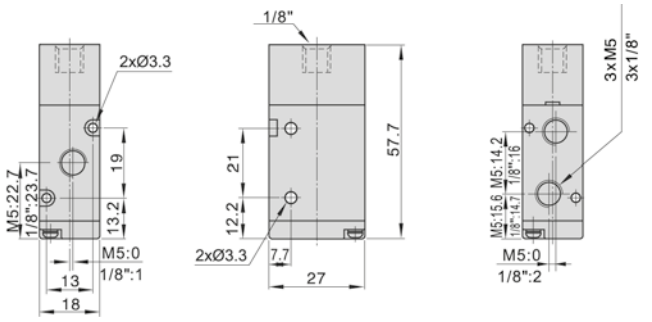

Connection	Exhaust connection	Control air port
M5 IT	M5 IT	G 1/8 IT

Technical information

Port identification pneumatic valves

	Designation at the valve	corresponds to
Input port	P	1
Output port	A	2
Output port	B	4
Exhaust port	R	3
Exhaust port	S	5
Control port	Y	12
Control port	Z	14

RIEGLER & Co. KG
Schützenstraße 27
72574 Bad Urach
Tel. +49 7125 9497-642
technik@riegler.de

Subject to technical changes and errors reserved.
The proficiency testing is the responsibility of the user.
28.10.2026 The specified data do not represent legally guaranteed properties.

Accessories

	Art. No.	Type No.
Multi-base plate for 3/2-way valve pneumatic / electropneumatic, 2 valve positions, for valves connection M5, G 1/8	116220	5510.02-18
Multi-base plate for 3/2-way valve pneumatic / electropneumatic, 3 valve positions, for valves connection M5, G 1/8	116223	5510.03-18
Multi-base plate for 3/2-way valve pneumatic / electropneumatic, 4 valve positions, for valves connection M5, G 1/8	116226	5510.04-18
Multi-base plate for 3/2-way valve pneumatic / electropneumatic, 5 valve positions, for valves connection M5, G 1/8	116229	5510.05-18
Multi-base plate for 3/2-way valve pneumatic / electropneumatic, 6 valve positions, for valves connection M5, G 1/8	116232	5510.06-18
Multi-base plate for 3/2-way valve pneumatic / electropneumatic, 7 valve positions, for valves connection M5, G 1/8	116235	5510.07-18
Multi-base plate for 3/2-way valve pneumatic / electropneumatic, 8 valve positions, for valves connection M5, G 1/8	116238	5510.08-18

RIEGLER & Co. KG
Schützenstraße 27
72574 Bad Urach
Tel. +49 7125 9497-642
technik@riegler.de

Subject to technical changes and errors reserved.
The proficiency testing is the responsibility of the user.
28.10.2026 The specified data do not represent legally guaranteed properties.