


# Throttle check valve

adjustable with slotted-head screwdriver

**PLUS** ||

Art. No. 106893

Type No. 342.018-8

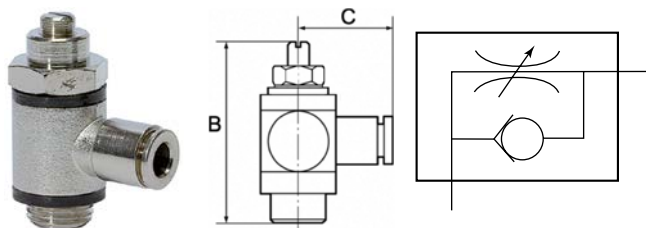

Exemplary illustration

For throttling flow rates and regulating the piston speed of cylinders. Small dimensions, ideal for tight spaces. To be screwed directly into the valve or cylinder. The set flow rate can be locked via the lock nut in the version with knurled screw. The variants in banjo bolt construction can be rotated during assembly and are fixed after tightening. The variants with plug-in connector, rotated can also be rotated freely after assembly. The seals and lubricants used are silicone-free.

Discontinued product. No longer available. New product 110107 (342.018-8-D)

## Technical data


|                    |                                                                          |
|--------------------|--------------------------------------------------------------------------|
| Function           | incoming air restriction                                                 |
| Version            | adjustable with slotted-head screwdriver                                 |
| Design             | L-shape, banjo bolt type                                                 |
| Operating pressure | 0 - 10 bar                                                               |
| Temperature range  | -20 to 80 °C                                                             |
| Type of connection | plug-in connector                                                        |
| Port 1             | plug connection Ø 8 mm                                                   |
| Port 2             | G 1/8 ET                                                                 |
| Medium             | filtered, lubricated compressed air                                      |
| Body               | nickel-plated brass                                                      |
| Sealant            | NBR                                                                      |
| Captive seals      | polyamide glass fibre-reinforced (only parts in banjo bolt construction) |
| Silicone-free      | yes                                                                      |
| a/f                | 14 mm                                                                    |
| B                  | 32.0 mm                                                                  |
| C                  | 23.7 mm                                                                  |

## Commercial data

|                         |                  |
|-------------------------|------------------|
| Customs tariff number   | 84812090         |
| Country of origin       | IT               |
| eCl@ss 5.1.4            | 27292203         |
| eCl@ss 9.0              | 27292203         |
| UNSPSC_Code_v190501     | 40141603         |
| UNSPSC_CodeDesc_v190501 | Pneumatic valves |

## Markings for valve functions

### Supply air throttle



Marking  
(alphabetical code)

V