


## Mini mist oiler



**Art. No. 101528**

**Type No. 769 K**

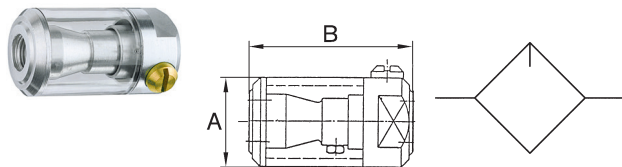

Exemplary illustration

For mounting on pneumatic impact tools (nail drivers, tackers, screwdrivers) which work intermittently.  
Also suitable for tools with continuous compressed air demand (grinding and polishing machines).

Fixed drip rate: Approx.  $0.4 \text{ cm}^3$  per 100 work cycles, one filling = 3000 work cycles.

Oil consumption in continuous operation (at 6 bar):  $0.15 \text{ cm}^3 / \text{Nm}^3$  (varies depending on ambient temperature and oil used).

Discontinued product. No longer available. New product (NONE)

### Technical data

Min. operating pressure	2 bar
Max. operating pressure	15 bar
Medium temperature	5 to 50 °C
Ambient temperature	5 to 50 °C
DN	8
Oil bowl	Polycarbonate
Flow direction	any
Mounting position	Oil intake at the lowest point
A	33.0 mm
B	60.0 mm
Weight	66.0 g

We recommend our special pneumatic oil (Art. No. 101135)


## Commercial data

Customs tariff number	84248970
Country of origin	DE
eCl@ss 5.1.4	27293201
eCl@ss 9.0	27293201
UNSPSC_Code_v190501	27131604
UNSPSC_CodeDesc_v190501	Pneumatic lubricators

## Material informations

REACH SVHC1 substance name	lead
CAS no. SVHC 1	7439-92-1
RoHS materials notice	RoHS compliant
REACH Info	contains SVHC substance

## Dimensions

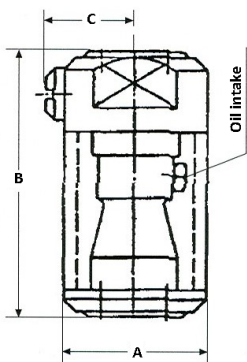

Thread	DN	A mm	B mm	C mm
G 3/8	8	33.0	60.0	21.0

## Accessories

	Art. No.	Type No.
Pneumatic special oil, in canister 2.5 litre, Suitable for use in a temperature range from -35 °C to 85 °C, incl. box and docu.	101135	32