


Plug nipple

»metallica« series

PLUS ||

Art. No. 129491

Type No. 8865.014

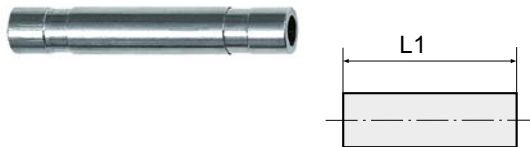

Exemplary illustration

All parts with a parallel thread are supplied with an FPM O-ring while the conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Only recommended for use in combination with quick connectors of the »metallica« series. Suitability testing for use with other series is the responsibility of the user.

Technical data

| | |
|-----------------------|--|
| Working pressure | -0.98 -16 bar |
| Operating temperature | -20 to 80 °C |
| Series | metallica |
| Material | Nickel-plated brass |
| Medium | compressed air |
| Applications | Compressed air systems, welding technology, vacuum |
| for tube O.D. | 14 mm |
| L1 | 53.0 mm |


Commercial data

| | |
|-------------------------|--------------|
| Customs tariff number | 74122000 |
| Country of origin | IT |
| eCl@ss 5.1.4 | 27294201 |
| eCl@ss 9.0 | 27294201 |
| UNSPSC_Code_v190501 | 27131613 |
| UNSPSC_CodeDesc_v190501 | Air coupling |

Material informations

| | |
|----------------------------|-------------------------|
| REACH SVHC1 substance name | lead |
| CAS no. SVHC 1 | 7439-92-1 |
| RoHS materials notice | RoHS compliant |
| REACH Info | contains SVHC substance |

Dimensions

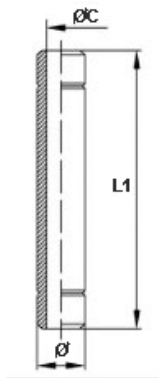

| for tube O.D. | Ø C | L1 |
|---------------|------|------|
| mm | mm | mm |
| 14 | 12.0 | 53.0 |