

## Y-connectors

»metallica« series

**PLUS**

Art. No. 129844

Type No. 853.004



Exemplary illustration

All parts with a parallel thread are supplied with an FPM O-ring while the conical threads are coated with preCOTE 5 dispersion; all fittings in this series can thus also be used at high temperatures (medium compressed air).


### Technical data

|                       |  |
|-----------------------|--|
| Working pressure      | -0.98 - 16 bar                                     |
| Operating temperature | -20 to 150 °C                                      |
| Series                | metallica  |
| Material              | Nickel-plated brass                                |
| Medium                | Compressed air                                     |
| Sealant               | FKM  |
| Sleeve                | Nickel-plated brass                                |
| Clamping ring         | Stainless steel                                    |
| Applications          | Compressed air systems, welding technology, vacuum |
| Recommended hose      | PA and PU  |
| For tube O.D.         | 4 mm   |
| L1                    | 34.2 mm  |

### Commercial data

|                         |              |
|-------------------------|--------------|
| Customs tariff number   | 74122000     |
| Country of origin       | IT           |
| eCl@ss 5.1.4            | 27294201     |
| eCl@ss 9.0              | 27294201     |
| UNSPSC_Code_v190501     | 27131613     |
| UNSPSC_CodeDesc_v190501 | Air coupling |

## Dimensions

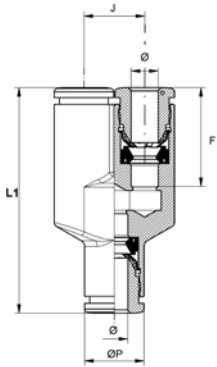

| For tube O.D. | F    | L1   | ØP  | J   |
|---------------|------|------|-----|-----|
| mm            | mm   | mm   | mm  | mm  |
| 4             | 15.0 | 34.2 | 9.0 | 9.2 |