

Blanking plug made of stainless steel 1.4404

»NonPlusUltra«

STAINLESS STEEL

Art. No. 132127

Type No. 870.004 ES FDA









Exemplary illustration

The »NonPlusUltra« series combines excellent material quality with the best workmanship. All components are characterized by maximum tightness and optimized flow. Made entirely of corrosion-free and acid-resistant stainless steel with a surface roughness (Ra) < 0.8, they are extremely robust and easy to clean (can also be sterilized). Movable fittings are suitable for continuous movement due to a special swivel mechanism.

The stainless steel unions have a wide range of applications, for example in process engineering, food and pharmaceutical industries, water-cooling, lubrication, gases, vacuum and clean room (suitable cleaning of the parts is the responsibility of the user).

Available on request with EPDM seals, EPDM seals with drinking water approval, suitable for cleanroom class 3 according to DIN EN ISO 14644-1 and with colored ceramic coding.

Technical data

Operating temperature	-20 to 150 °C	
Medium temperature	-20 to 150 °C	
Working pressure compressed air and neutral gases max.	16 bar	
Working pressure liquids, oil, grease max.	150 bar	
Material	Stainless steel 1.4404	
Medium	Compressed air, neutral gases and liquids, oil, grease	
L1	19.0 mm	
D	5.8 mm	
Suitable pipe materials	PE, PA, PU, PTFE, FEP, Pipes	
Plug connection	4 mm	




Commercial data

Customs tariff number	73072910
Country of origin	DE
eCl@ss 5.1.4	27294201
eCl@ss 9.0	27294201
UNSPSC_Code_v190501	27131613
UNSPSC_CodeDesc_v190501	Air coupling

Material informations

REACH SVHC1 substance name	no	
CAS no. SVHC 1	no CAS No.	
RoHS materials notice	RoHS compliant	
REACH Info	no SVHC substance included	

Insertion depth of tube




For	tube	O.D.	t1
		0.0.	٠.

4 mm	ca. 12.3 mm
6 mm	ca. 15 mm
8 mm	ca. 18 mm
10 mm	ca. 20.3 mm
12 mm	ca. 25.3 mm
14 mm	ca. 28.2 mm
16 mm	ca. 31.3 mm
20 mm	ca. 44 mm



Materials/Construction

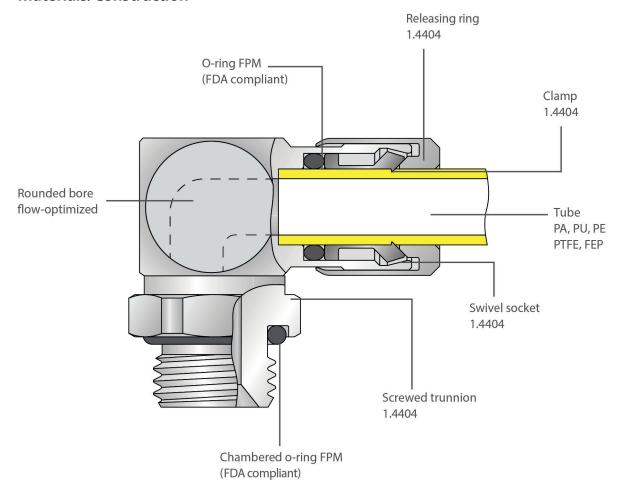

Ceramic colour coding on request.

