


Mini mist oiler



Art. No. 137718

Type No. MNOG38.10B

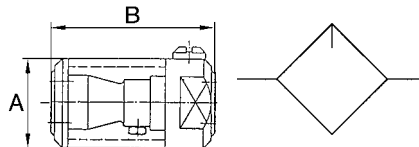

Exemplary illustration

For mounting on pneumatic impact tools (nail drivers, tackers, screwdrivers) which work intermittently.
Also suitable for tools with continuous compressed air demand (grinding and polishing machines).

Fixed drip rate: Approx. 0.4 cm³ per 100 work cycles, one filling = 3000 work cycles.

Discontinued product. No longer available. New product (NONE)

Technical data

Max. operating pressure	10 bar
Medium temperature	0 to 50 °C
Ambient temperature	0 to 50 °C
DN	8
Oil bowl	Polycarbonate
Flow direction	any
Mounting position	Oil intake at the lowest point
A	33.0 mm
B	60.0 mm
Weight	87.0 g

We recommend our special pneumatic oil (Art. No. 101135)


Commercial data

Customs tariff number	84248970
Country of origin	DE
eCl@ss 5.1.4	27293201
eCl@ss 9.0	27293201
UNSPSC_Code_v190501	27131604
UNSPSC_CodeDesc_v190501	Pneumatic lubricators

Material informations

REACH SVHC1 substance name	lead
CAS no. SVHC 1	7439-92-1
RoHS materials notice	RoHS compliant
REACH Info	contains SVHC substance

Dimensions

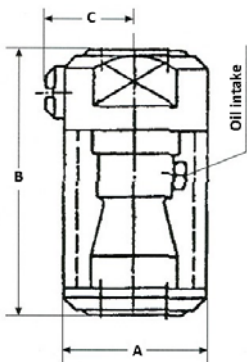

Thread	DN	A mm	B mm	C mm
G 3/8	8	33.0	60.0	22.0

Accessories

	Art. No.	Type No.
Pneumatic special oil, in canister 2.5 litre, Suitable for use in a temperature range from -35 °C to 85 °C, incl. box and docu.	101135	32