


SPECIFICATION	
description	distributor block with integral ball valves
pressure range	vacuum to 10 bar
operation	screwdriver (width 4 to 6 mm)
rotation angle	90°
temperature range	-10° C to +100° C
orifice (per channel)	DN 8 mm
material	body: anodised aluminium alloy ball and spindle: chromed brass ball seals: teflon (PTFE) O-Ring: perbunan (NBR)
mounting	via 2 holes in body, for M5 screws
other versions	on application: specified number of outlets, control knob operation

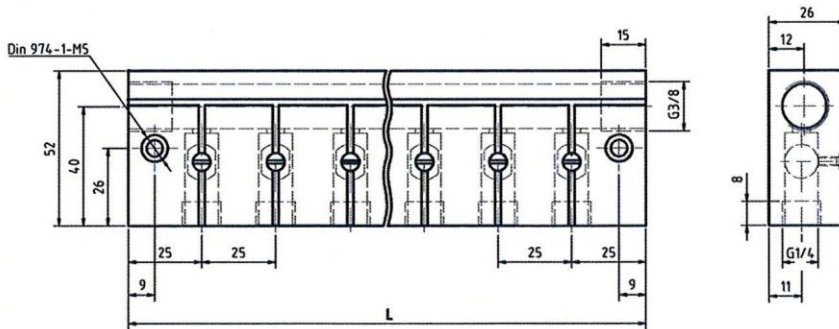

This handy unit serves as a compact distributor and isolator block in complex machines and installations, where it is necessary to open or close individual circuits.

The slot in the spindles indicates the open or closed status of the individual channels.

Artikel Nr.	Typen Nr.	number of outlets	length (mm)	weight (approx. g)
103578	VT 5226	6	175	650
103579	VT 5228	8	225	730
103580	VT 52210	10	275	890