



Aus Polyamid.

Temperaturbereich: -40 bis 85 °C



258.10

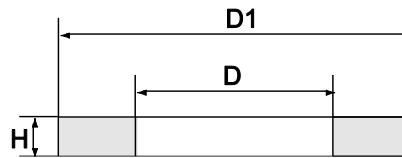

Dichtringe aus Polyamid					
Artikel Nr.	Ident Nr.	für Gewinde	D mm	D1 mm	H mm
258.05	114088	M5	5,1 ±0,2	8,0 ±0,2	1,0 ±0,10
258.06	114089	G 1/8	10,0 ±0,2	13,0 +05/-0,2	1,5 ±0,10
258.07	114090	G 1/4	13,2 ±0,2	18,0 ±0,2	1,5 ±0,10
258.08	114091	G 3/8	16,8 ±0,2	22,0 ±0,2	1,5 ±0,10
258.09	114092	G 1/2	21,0 ±0,2	28,0 ±0,2	1,5 ±0,10
258.10	114093	G 3/4	26,8 ±0,2	33,0 ±0,3	2,0 ±0,15
258.10/1	114094	G 1	33,3 ±0,2	38,9 ±0,2	2,0 ±0,15