


# Male branch tees

»metallica« series

**PLUS**

Art. No. 108936

Type No. 8855.038-8

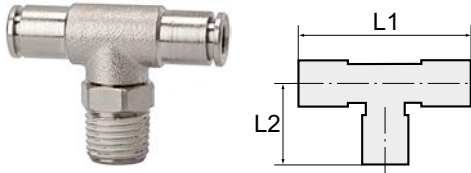

Exemplary illustration

All parts with a parallel thread are supplied with an FPM O-ring while the conical threads are coated with preCOTE 5 dispersion; all fittings in this series can thus also be used at high temperatures (medium compressed air).

## Technical data

Working pressure	-0.98 - 16 bar
Operating temperature	-20 to 150 °C
Series	metallica
Material	Nickel-plated brass
Medium	Compressed air
Sealant	FKM
Sleeve	Nickel-plated brass
Clamping ring	Stainless steel
Applications	Compressed air systems, welding technology, vacuum
Recommended hose	PA and PU
Version	coated with PTFE
Thread	R 3/8
For tube O.D.	8 mm
L1	47.0 mm
L2	28.0 mm
a/f	18 mm
Thread form	conical male thread
Design	swivel type


## Commercial data

Customs tariff number	74122000
Country of origin	IT
eCl@ss 5.1.4	27294201
eCl@ss 9.0	27294201
UNSPSC_Code_v190501	27131613
UNSPSC_CodeDesc_v190501	Air coupling

## Material informations

REACH SVHC1 substance name	lead
CAS no. SVHC 1	7439-92-1
RoHS materials notice	RoHS compliant
REACH Info	contains SVHC substance

## Dimensions



Thread	For tube O.D.	Ø B	H	a/f	L1	L2
	mm	mm	mm	mm	mm	mm
R 3/8	8	18.0	11.0	18	47.0	28.0

## Accessories

	Art. No.	Type No.
Plug nipple »metallica«, hose exterior Ø 8, nickel-plated brass	142789	8865.008