


Stopper valve, straight push-in bulkhead connector

»blue series«

EASY

Art. No. 110213

Type No. 230.016-8

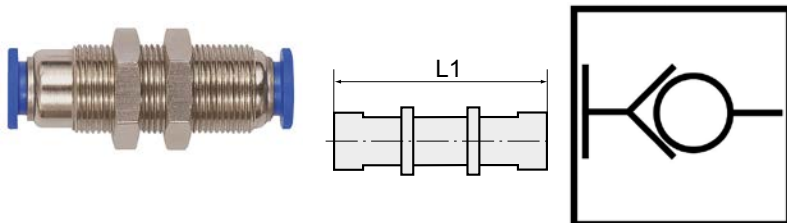

Exemplary illustration

Functional principle of a coupling: The compressed air supply is completely shut off as soon as the hose is detached from the connector.

Flow is only guaranteed when the hose is firmly inserted.

Attention: Only release the hose without pressure and hold the end of the hose to the plug connection when losing to prevent injuries from the "whip effect".

Technical data

Working pressure	0 - 10 bar
Temperature range	0 to 60 °C
Series	Blue series
Material	Plastic and nickel-plated brass
Medium	Compressed air
Sealant	NBR
Sleeve	Plastic blue
Applications	Compressed air systems
Recommended hose	PU or PA (nylon)
Function	Self-locking
Thread	M16x1.0
For tube O.D.	8 mm
L1	50.8 mm
a/f	19 mm

The suitability test for the use with alternative specifications is the user's responsibility.

Pay attention to the correct installation! Flow direction from 1 = external thread on the body to 2 = no external thread on the body results in the desired stop function when removing the hose from 2. Flow in the opposite direction is possible, but without a stop function.


Commercial data

Customs tariff number	39174000
Country of origin	CN
eCl@ss 5.1.4	27294201
eCl@ss 9.0	27294201
UNSPSC_Code_v190501	27131613
UNSPSC_CodeDesc_v190501	Air coupling

Material informations

REACH SVHC1 substance name	lead
CAS no. SVHC 1	7439-92-1
RoHS materials notice	RoHS compliant
REACH Info	contains SVHC substance

Dimensions



Thread	For tube O.D.	a/f	L1	E1
	mm	mm	mm	mm
M16x1.0	8	19	50.8	25.3